

Quick-Fix self-adhesive Solid brass Tactile Indicator

Product Code: T03SA

Technical Data Sheet



Technical Data

- Code: T03SA
- Material: Solid brass with high performance 3M VHB instant bonding compound
- Dimensions: Outer Diameter 35mm x top diameter 25mm x Height 4.5mm
- Slip Rating: P5 (*test report available on request*)

Features

- Produced with polished finish
- 8 Year warranty against rust & corrosion
- 2 Year replacement guarantee

Compliance

Floorsafe Australia's T03SA brass Tactiles are manufactured to comply with the following standards:

- National Construction Code Section D3.8
- Australian/New Zealand Standard 1428.1 2009 – Design for access and mobility – Design for access and mobility: General requirements for access – New building works
- Australian/New Zealand Standard 1428.4.1 2009 – Design for access and mobility – Means to assist the orientation of people with vision impairment: Tactile ground surface indicators
- Australian/New Zealand Standard 4586 - 2013 – Slip resistance classification of new pedestrian surface materials

Floorsafe recommend that on all external areas ramps, slopes & wet areas a tactile with a carborundum infill should be considered.

Installation Instructions

Providing surfaces are thoroughly clean & dry a 100% bond will be achieved and make it virtually impossible for the tactile's to be removed.

POROUS SURFACES: Please apply a spray mist of the provided Surface Primer product over the surface and leave to dry.

Suitable for all clean & flat surfaces. Tiled, concrete, timber, terrazzo, marble, wood, asphalt, Vinyl & metal.

1. Use masking tape to mark the area where the tactiles have to be installed.
2. Place the template into position and tape corners to hold the template firm.
3. Remove Release Paper from the back of the tactile and simply drop the tactile into template
4. Using a rubber hammer tap lightly to make sure full adhesion occurs
5. Once the template is complete with the tactiles lift and remove it.
6. To continue place the first 3 circle rows on the template over the last 3 rows of completed tactiles. This will make sure the line is running straight. Continue as item 3.

Luminance Contrast

The Building Code of Australian/New Zealand and the AS/NZS 1428.4.1 require a minimum luminance contrast of 30%. Guide lines are as follows:

- Integrated tactile indicators – not less than 30% across the entire area
- Discrete (individual) tactile indicators – not less than 45%
- Where Discrete tactile indicators are constructed of two colours or materials the raised section shall have a minimum contrast of 60%

Test - AS.NZS 1428.4.1 2009 Appendix E (pg 70-77)



LAYOUT REQUIREMENTS FOR STAIRS, RAMPS, ESCALATORS AND MOVING WALKS

TGSI's provide cues, which, when combined with other environmental information assist people who are blind or vision impaired with their orientation. This system has been designed to provide warning of an approaching hazard to the blind and vision impaired.

Tactiles must meet the requirements of the Building Code of Australia (BCA) Section D Clause 3.8, Australian and New Zealand Standards 1428.4.1-2009 & The Disability Discrimination Act (DDA).

Luminance Contrast

Over 330,000 Australians are blind or vision-impaired. With the ageing Australian population this is expected to double in the next 20 years. Up to 90% of people with vision impairment still retain some sight and for this reason luminance contrast can play an important part. The Building Code of Australian/New Zealand requires a minimum luminance contrast of 30%.

Luminance contrast to the base surface is as follows:

Integrated tactile indicators – not less than 30% across the entire area

Discrete (individual) tactile indicators – not less than 45%

Discrete tactile indicators constructed of two colours or materials the raised section shall have a contrast not less than 60%


Placement

- Full width of the path of travel
- Perpendicular to the direction of travel when approaching a hazard
- Set back 300mm from the edge of hazard (except at railway stations and wharves) and installed 600mm deep.
- Shall be located at the top and bottom of stair ways, ramps, escalators and moving walks. (see Figure 1)


Landings

- Where the distance of the landing is less than 3000mm to the nearest nosing edge the tactile indicators shall be over a distance of 300-400mm (see Figure 2.a)
- Where the distance of the landing is 3000mm or more to the nearest nosing edge the warning indicators shall be over a distance of 600-800mm (see Figure 2.b, Figure 2.d and Figure 3)
- If a continuous handrail exists on both sides and the landing is less than 3000mm tactile indicators are not required (see Figure 1.c).


Figure 1

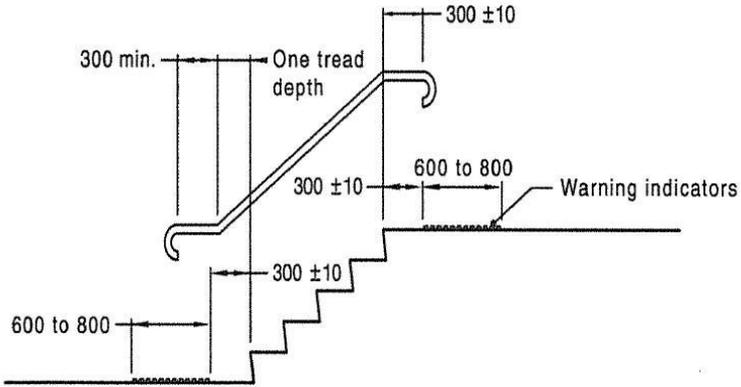


b) Stairways

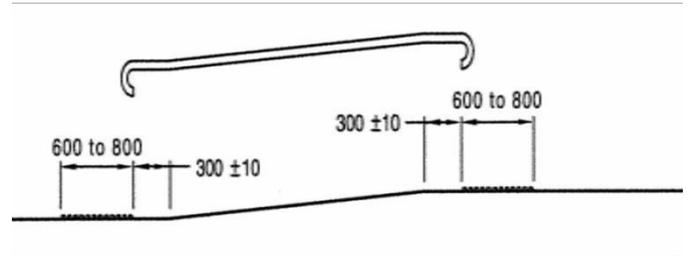

a) Ramp

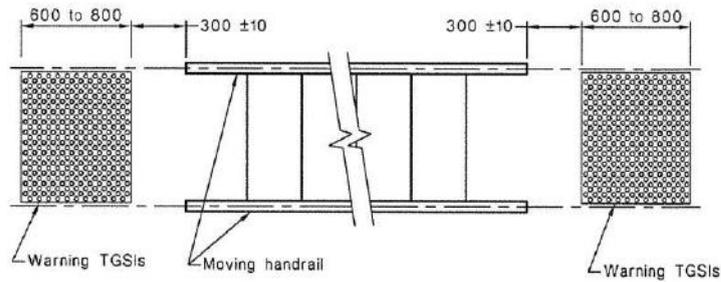


(a) Plan

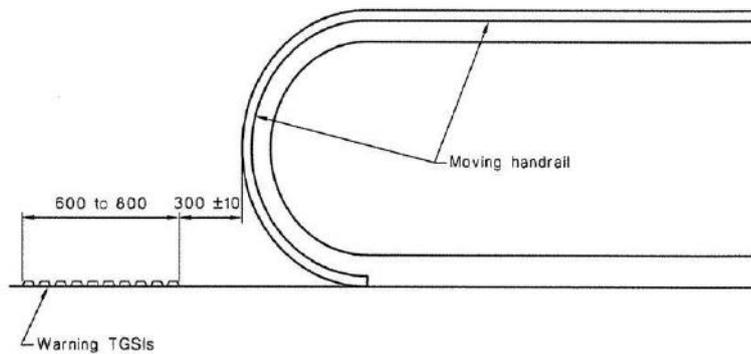


c) Escalators and moving walks

Figure 2

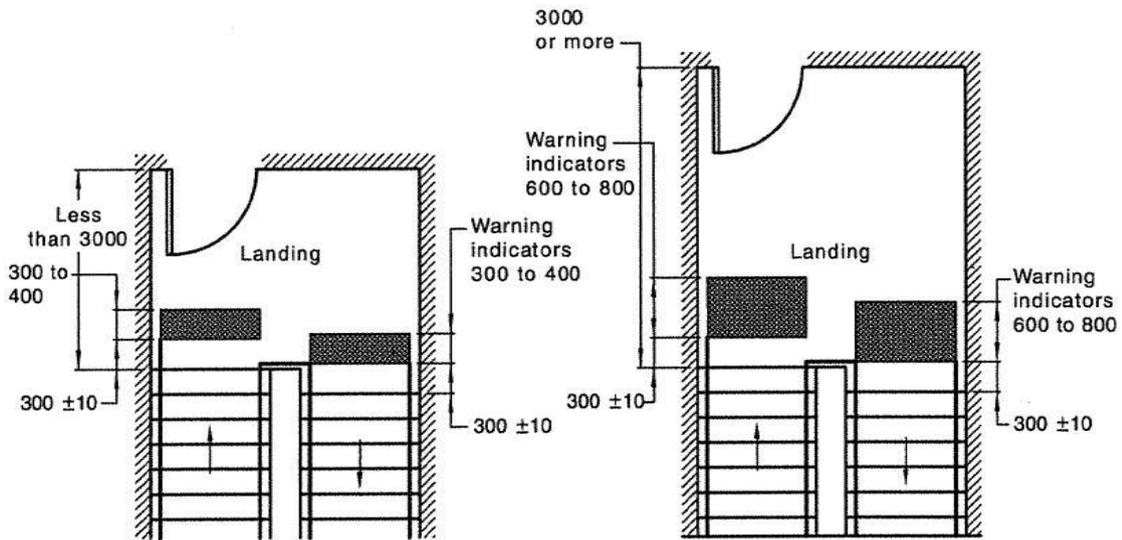

a) Stairway with landing less than 3000mm and no continuous outer handrail


b) Stairway with landing greater than 3000mm and no continuous handrail

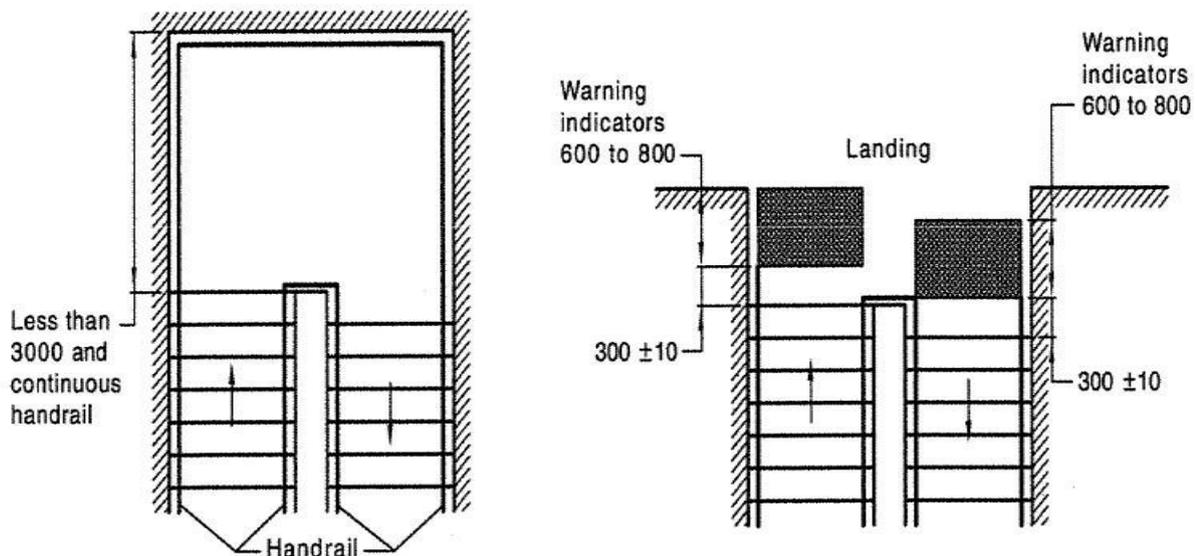

c) Plan of enclosed stair way with landing less than 3000m with continuous handrail

d) Unenclosed stairway

Figure 3

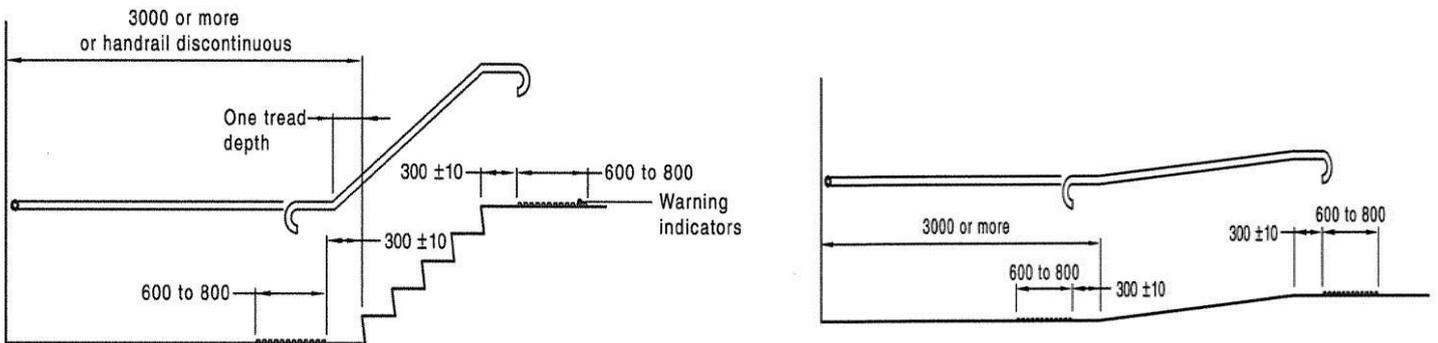

- a) Side elevation where bottom landing is greater than 3000m wide and/or has a discontinuous handrail