


ANTI-SLIP METAL STRIPS – Product Code CARB

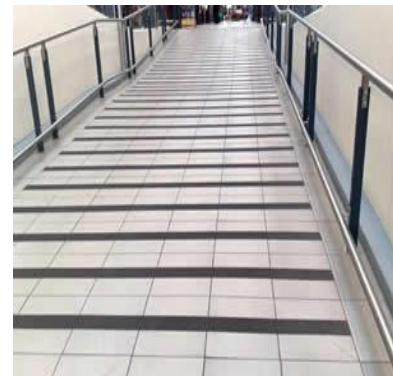

Anti-slip safe to AS/NZS 4586:2004

Lengths available up to 2400mm or custom made to required size.

Standard stock colours available including Safety yellow, black, white & grey

Introduction

Floorsafe Australia Carborundum Anti-slip strips are specially made for installation over new and existing steps, ramps and stairways. It is applicable where pedestrian safety areas is of a particular concern.

The strip inserts are constructed from a 1.6mm galvanised flat metal strip. Firstly the metal is special prepared using a special cleaning down process before it is primed with a special primer coating. After 12 hours of drying a coating of a two part Polyurethane coating is applied. Whilst wet a #60 grade aluminium oxide granules is broadcasted over which provides the finish product with its anti-slip properties. Two further coats of the 2-part Polyurethane product is applied resulting in a finished product that is very hard wearing, flexible, UV & chemical resistant surface.

Ultimate In Anti-Slip Safety

This product provides the highest possible P5 safety rating and is particularly suitable for external wet areas. The finished product exceeds the requirements of the Australian/New Zealand Standards AS/NZS 4586:2004

Length

- Available in 2400mm lengths or cut to required sizes. Standard stock widths are 40mm & 50mm but we can custom make to any width & length.

Colour

- Standard colours of Safety Yellow, Black, white or Grey. All other colours can be made by request.

PRINCIPAL CHARACTERISTICS

- Tough, flexible and abrasion resistant
- Unlimited re-coat
- Excellent resistance to atmospheric exposure
- Excellent colour and gloss retention
- Resistant to splash of mineral and vegetable oils, white spirit, paraffin and aliphatic petroleum products
- Resistant to most chemicals
- Guaranteed for 5 years